

VTH5241DW-S2

IP & Wi-Fi Indoor Monitor



Features

- 10" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- 6ch wired alarm integration, 8ch wireless alarm integration(Only support 433MHZ)
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



Technical Specification

Model	VTH5241DW-S2
-------	--------------

System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

Video

Video Compression	H.264
-------------------	-------

Audio

Audio Compression	G.711
-------------------	-------

Audio Input	All-direction Microphone
-------------	--------------------------

Audio Output	Built-in Loudspeaker
--------------	----------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Display

LCD Screen	10" 1024x600
------------	--------------

Operation Mode

Input	Touch buttons and capacitive screen
-------	-------------------------------------

Interface

Wired Zones	6 on-board zones
-------------	------------------

Wireless Zones	8 wireless zones
----------------	------------------

Alarm Out	1
-----------	---

RS485	1
-------	---

Network

Wi-Fi	IEEE802.11b/g/n 2400~2483.5MHz CE EIRP≤20dBm, FCC POWER≤30dBm
-------	---

Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Network Protocol	TCP/IP
------------------	--------

General

Memory Slot	Micro SD, Max 32GB
-------------	--------------------

Installation	Surface
--------------	---------

Power	DC 12V, PoE (802.3af)
-------	-----------------------

Power Consumption	Work ≤8W
-------------------	----------


Working Temperature	-10°C to +55°C
---------------------	----------------

Relative Humidity	10%RH~90%RH
-------------------	-------------

Dimensions	265.0mm×180.0mm×22.5mm
------------	------------------------

Weight	1kg
--------	-----

Dimensions

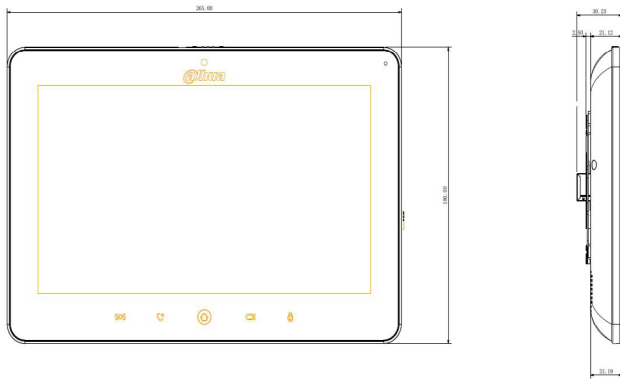

Application

